

L&C Enterprises – USA, Inc.
6652 N.75 Drive, Escanaba, MI 49829
Phone: (906) 786-1008
Toll Free: (866) 786-1009

EASY TWIST TIES™ – INSTRUCTIONS

Easy Twist Ties™ are installed in the following manner:




1. Push tie around post/rail and one strand on the chain-link fabric that is closest to the post/rail. Exception: 3 1/2", 4" & 4 1/2" ties. See note below.
2. Position ends of tie in same direction of fabric line on the side of post/rail. *See diagram 1*
3. Pinch ends together and insert into twisting tool. Ends should be evenly inserted: bumping up to the back of the twisting tool.
4. Twist tie with drill until tie end breaks off. (Optional: Bend remaining ends with pliers until they break off at the score. Should break off with one or two bends.)
5. Pick up broken ends (if required).

CAUTION: Safety glasses MUST be worn while twisting ties. The small ends of the tie wires will fly out of the side slots and may cause injury if they hit operator in the eye.

Note 1: for 3 1/2", 4" & 4 1/2" ties, the tie is pushed around the post/rail and two strands of the chain-link fabric: at a joint of a diamond. *See diagram 2*

Note 2: The above ties are for use with 2" mesh only.

Note 3: *The Easy Twist Tool may break off one or both tails of the tie. It is an acceptable practice to allow a tie with or without a tail.*

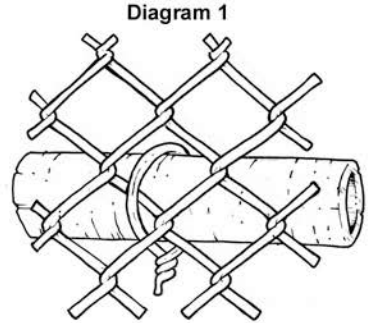

WARNING: Do not use this where children are present. Only recommended for heavy commercial/industrial applications with low pedestrian traffic.